




RK-EU-AC05

Acoustic luminaires

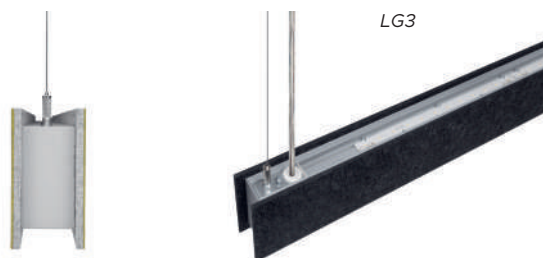


DESCRIPTION: **Acoustic suspended decorative LED luminaire**
Light distribution type: direct/indirect
Optical system: opal polycarbonate diffuser
Housing: aluminium
Colour: made to the customer's specification

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40
Mechanical impact resistance: IK05
Operating temperature range, °C: ta 0...+35

INSTALLATION: Suspended (wire and cap to be ordered separately). Cable 2.0m, 3x0.75mm², transparent

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, retail, public place

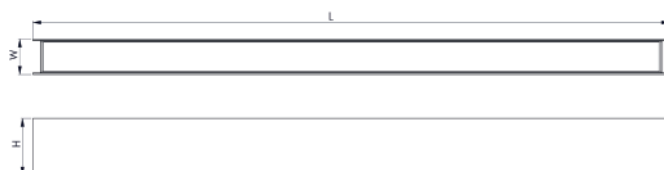

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-AC05 1x1650/1050 J413 T840 OP M... (felt colour code)	1159	50	99	2644	21,0	125	80+	4000	3,9
RK-EU-AC05 1x2200/1450 J414 T840 OP M... (felt colour code)	1159	50	99	3604	29,4	122	80+	4000	3,9
RK-EU-AC05 1x3050/1950 J415 T840 OP M... (felt colour code)	1159	50	99	4953	43,1	114	80+	4000	3,9
RK-EU-AC05 1x2050/1400 J416 T840 OP M... (felt colour code)	1439	50	99	3392	26,4	128	80+	4000	4,8
RK-EU-AC05 1x2750/1900 J417 T840 OP M... (felt colour code)	1439	50	99	4622	37,8	122	80+	4000	4,8
RK-EU-AC05 1x3800/2600 J418 T840 OP M... (felt colour code)	1439	50	99	6354	54,9	116	80+	4000	4,8

*Tolerance range for optical and electrical data : -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black

Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - at least 2pcs MTG KIT SUSI for one fitting required. For exact quantity please refer to installation manual*



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm


OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	COLOUR
T830	OP	DALI	RAL
T840	DPRZ LT80	DALIsep	M... (felt colour code) ²
		PULL ¹	
		PULLDIM ¹	
		Lsep	

1 For PULL and PULLDIM options luminaire housing is 50mm longer and switch is positioned at the end of luminaire

2 List of material colour is found on page 304

OP



DPRZ LT80

