



RK-EU-SU13

Surface and Suspended Luminaires



DESCRIPTION:	Decorative ring shaped LED luminaire Light distribution: direct Optical system: opal PMMA diffuser, UV stabilized Housing: steel Colour: white, RAL9003S
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 50000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP40 Mechanical impact resistance: IK02 Operating temperature range, °C: ta 0...+35
INSTALLATION:	On the ceiling or suspended (accessories to be ordered separately). Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Indoor
APPLICATION:	Office, education, retail, public place

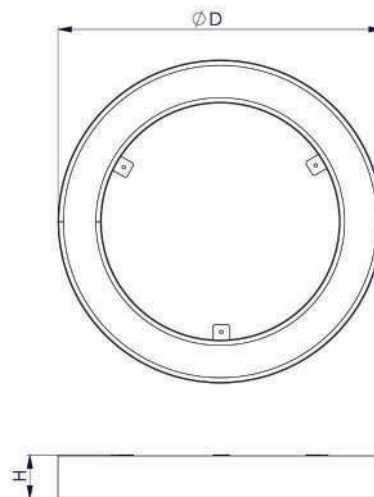

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SU13 1x2050 J134 T840 OP LT80	600	80	2014	16,9	119	80+	4000	4,6
RK-EU-SU13 1x2750 J135 T840 OP LT80	600	80	2744	23,6	116	80+	4000	4,6
RK-EU-SU13 1x3800 J136 T840 OP LT80	600	80	3772	34,6	109	80+	4000	4,6
RK-EU-SU13 1x3300 J137 T840 OP LT80	900	80	3295	26,4	125	80+	4000	6,8
RK-EU-SU13 1x4500 J138 T840 OP LT80	900	80	4491	37,7	119	80+	4000	6,8
RK-EU-SU13 1x6200 J139 T840 OP LT80	900	80	6173	54,9	112	80+	4000	6,8
RK-EU-SU13 1x4400 J140 T840 OP LT80	1200	80	4394	34,8	126	80+	4000	8,9
RK-EU-SU13 1x6000 J141 T840 OP LT80	1200	80	5987	49,8	120	80+	4000	8,9
RK-EU-SU13 1x8250 J142 T840 OP LT80	1200	80	8231	72,4	114	80+	4000	8,9

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - at least 3pcs MTG KIT SUSI for one fitting required. For exact quantity please refer to installation manual*



Product: CAP cable 3x0.75 2.0m clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent



Product: 3-point Suspension MTG KIT with round cap, white/ light grey/ black
Description: Suspension wire set with round cap 3x"I" type, 1.5m adjustable, white/ light grey/ black, 1pcs
**note - for compatibility with exact product please refer to installation manual*



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black



Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black

Product: Surface MTG KIT (RK-EU-SU13) A P9003S

Description: Surface mounting plates for Forma O LED, white steel, 3 pcs
**check RAL colour to match luminaire*

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	CONNECTION	COLOUR
T830	OP LT80	DALI	CBF3-2.0m clear	RAL
T840	DPRZ LT80	EAIRB-M ^{1 2 3 4}	CBF3-3.0m clear	
		EAIRB-S ^{2 3 4}	CBF5-2.0m clear	
		BLT	CBF5-3.0m clear	
		KRBLT		
		KRBLT DALI		
		COR		
		COR1min		
		COR30min		

1 Ingress protection IP20

2 Max system size 1x EAIRB-M + 3x EAIRB-S

3 Max wire length from EAIRB-M to last EAIRB-S - 11 m

4 EAIRB option not applicable for models: (J134...J136)

STANDARD

