




RK-EU-PL02

Park and Street Lights



DESCRIPTION:	Ground-mounted LED bollard Light distribution type: direct Optical system: white thermoplastic reflector, clear polycarbonate diffuser, impact resistant Housing: aluminium Colour: dark grey, RAL7043
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 50000/L80B50 SDCM: 5 Protection class IEC: I Ingress protection code: IP65 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -20...+35
INSTALLATION:	On the ground (flange mounting plate included). Screw terminal, 3x1x1.5mm ²
ENVIRONMENT:	Outdoor
APPLICATION:	Park, public space

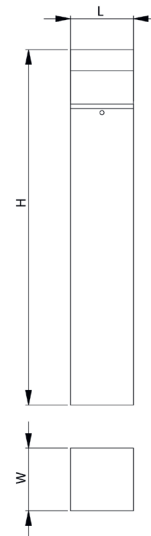

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PL02 1x1200 J707 T840	150	150	800	1197	14,0	86	80+	4000	3,9

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Ground MTG KIT - RK-EU-PL01
Description: Kit for mounting the luminaire to the ground

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	CONNECTION	COLOUR
T830	DALI	LOOP	RAL
T840			

STANDARD

