

RK-EU-SU09

Surface and Suspended Luminaires




DESCRIPTION: Low profile decorative circle shaped LED luminaire **Light distribution:** direct/indirect
Diffuser: opal diffuser, UV stabilized, low glare
Housing: steel
Colour: white, RAL9003S

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: Suspended (accessories to be ordered separately). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, retail, public place

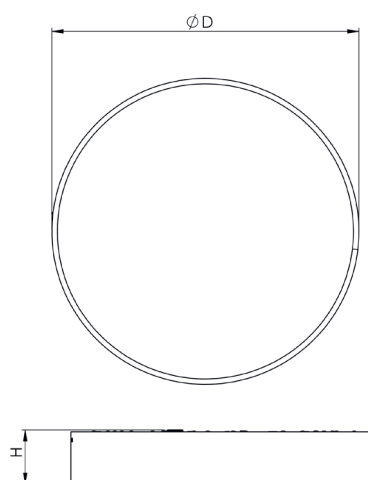

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SU09 1x4050/1250 K024 T840 OP LT80 LG3	450	80	5765	36,0	160	80+	4000	6,8
RK-EU-SU09 1x4850/1450 K025 T840 OP LT80 LG3	450	80	6892	43,5	158	80+	4000	6,8
RK-EU-SU09 1x5600/1700 K026 T840 OP LT80 LG3	450	80	8007	51,2	156	80+	4000	6,8
RK-EU-SU09 1x6200/1850 K027 T840 OP LT80 LG3	600	80	8123	50,5	161	80+	4000	10,8
RK-EU-SU09 1x7400/2250 K028 T840 OP LT80 LG3	600	80	9721	60,5	161	80+	4000	10,8
RK-EU-SU09 1x8650/2600 K029 T840 OP LT80 LG3	600	80	11303	70,3	161	80+	4000	10,8
RK-EU-SU09 1x9850/2950 K030 T840 OP LT80 LG3	900	90	12894	78,7	164	80+	4000	24,0
RK-EU-SU09 1x11500/3450 K031 T840 OP LT80 LG3	900	90	15172	93,4	162	80+	4000	24,0
RK-EU-SU09 1x13150/4200 K032 T840 OP LT80 LG3	900	90	17311	108,4	160	80+	4000	24,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: 3-point Suspension MTG KIT with round cap, white/ light grey/ black
Description: Suspension wire set with round cap 3x"l" type, 1.5m adjustable, white/ light grey/ black, 1pcs



Product: CAP cable 3x0.75 2.0m clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm




Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black

Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION	COLOUR
T830	OP LT80	DALI	EM3	CBF3-2.0m clear	RAL
T840	DPRZ LT80	BLT	EM3A	CBF3-3.0m clear	
		KRBLT	EM3D	CBF5-2.0m clear	
		KRBLT DALI		CBF5-3.0m clear	

OP LT80 LG3



DPRZ LT80 LG3

