



RK-EU-FL09

Floodlights

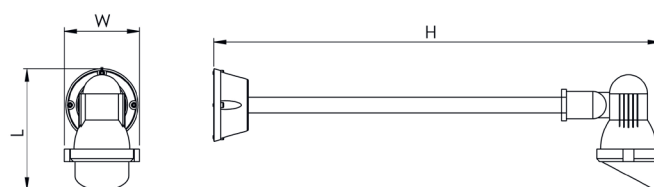

DESCRIPTION:	Surface mounted accent LED luminaire Light distribution type: direct Optical system: tempered glass diffuser, impact resistant Housing: aluminium Colour: dark grey, RAL7043
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 15000/L70B50 Protection class IEC: I Ingress protection code: IP65 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -25...+40
INSTALLATION:	On the wall. Screw terminal, 3x2.5mm ²
ENVIRONMENT:	Outdoor
APPLICATION:	Facade illumination

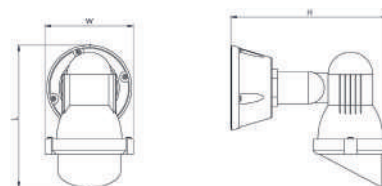

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-FL09 1GU10 Q87	150	101	210						0,7
RK-EU-FL09 1GU10 Q88 LONG	150	101	605						1,2
RK-EU-FL09 1x400 G870 T840 L40	150	101	210	397	4,2	95	80+	4000	1,4
RK-EU-FL09 1x400 G871 T840 LONG L40	150	101	605	397	4,2	95	80+	4000	1,4

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	COLOUR
T830	RAL
T840	

STANDARD

