

RK-EU-DL10

Downlights




DESCRIPTION: Recessed mounted LED downlight Light
distribution type: direct
Optical system: translucent micro-prismatic PMMA diffuser
Housing: steel
Colour: white, RAL9003S

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 50000/L80B10 (75000/L80B50 low power versions)
SDCM: 3
Protection class IEC: II
Ingress protection code: IP44
Mechanical impact resistance: IK05
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5 mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, hotel, corridor, bathroom, retail, showroom, public place

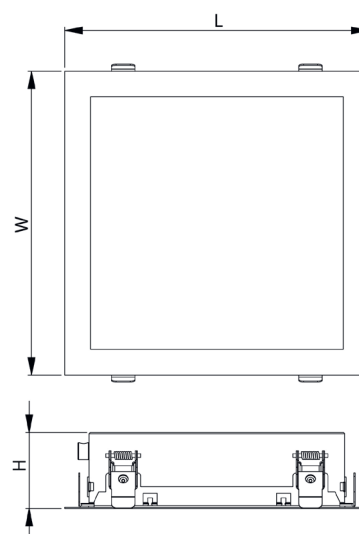

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DL10 1x1200 D984 T840 MPRZ LT92	260	260	65	245x240	1167	10,2	114	80+	4000	1,5
RK-EU-DL10 1x1650 D985 T840 MPRZ LT92	260	260	65	245x240	1631	14,7	111	80+	4000	1,5
RK-EU-DL10 1x2200 D986 T840 MPRZ LT92	260	260	65	245x240	2197	20,1	109	80+	4000	1,5
RK-EU-DL10 1x2700 D987 T840 MPRZ LT92	260	260	65	245x240	2688	27,6	97	80+	4000	1,5

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	EMERGENCY	CONNECTION	COLOUR
T830	DALI	EM3A	WIE3-0.5m	RAL
T840		EM3D	WIE5D-0.5m	
			QBX2-0.1m	
			Europlug-1.5m	
			Europlug-3.0m	

MPRZ LT92

