

RK-EU-SPT11

Spotlights




DESCRIPTION: Recessed mounted adjustable LED spotlight
Light distribution type: direct
Optical system: faceted aluminium reflector, 60°, tilting 90°, tempered glass diffuser
Housing: aluminium
Colour: white, RAL9016

GENERAL DATA: **Mains voltage:** 220-240V, 50-60Hz (220-240V, 0/50-60Hz for models D746, J206, D787)
LED lifetime, h: 60000/L80B10
SDCM: 3
Protection class IEC: II
Ingress protection code: IP40
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5mm²

ENVIRONMENT: Indoor

APPLICATION: Retail, showroom, exhibition, public place

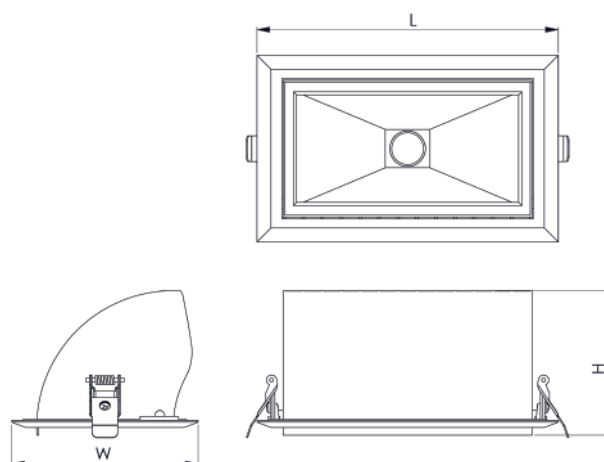

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-SPT11 1x1900 D744 T840 R60	236	146	107	223x133	1924	13,5	143	80+	4000	2,5
RK-EU-SPT11 1x2550 D745 T840 R60	236	146	107	223x133	2613	19,8	132	80+	4000	2,5
RK-EU-SPT11 1x3350 D746 T840 R60	236	146	107	223x133	3518	27,1	130	80+	4000	2,5
RK-EU-SPT11 1x4250 J206 T840 R60	236	146	107	223x133	4414	35,1	126	80+	4000	2,5
RK-EU-SPT11 1x4800 D787 T840 R60	236	146	107	223x133	5041	42,1	120	80+	4000	2,5
RK-EU-SPT11 1x5250 D747 T840 R60	236	146	107	223x133	5606	46,6	120	80+	4000	2,5

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	CONNECTION	COLOUR
T830	DALI	WIE3-0.5m	RAL
T840		WIE5D-0.5m	
T930		Europlug-1.5m	
T940		Europlug-3.0m	
T820 MEAT			
T831 MEAT&WHITE			
T825 BREAD			
T930 VEGETABLES			
T932 FASHION			
T931 FASHION&WHITE			
T927 NATURAL			
T930 NATURAL			
T940 NATURAL			

STANDARD

