



RK-EU-PA08

Recessed Panels




DESCRIPTION: Recessed mounted decorative LED luminaire
Light distribution type: direct
Optical system: opal PMMA diffuser
Housing: steel
Colour: white, RAL9003

GENERAL DATA: **Mains voltage:** 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40/20
Mechanical impact resistance: IK05
Operating temperature range, °C: ta 0...+35

INSTALLATION: In modular suspended ceilings (600), in ceilings with cut-out openings (mounting frame to be ordered separately). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

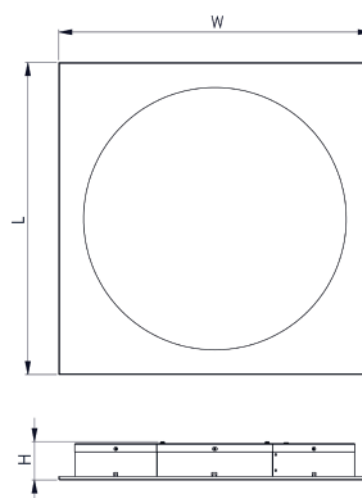

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA08 1x3600 J496 T840 OP LT80	595	595	100	3564	25,5	140	80+	4000	3,1
RK-EU-PA08 1x4450 J497 T840 OP LT80	595	595	100	4419	32,3	137	80+	4000	3,1
RK-EU-PA08 1x6050 J498 T840 OP LT80	595	595	100	6022	45,6	132	80+	4000	3,1
RK-EU-PA08 1x6850 J499 T840 OP LT80	595	595	100	6817	52,7	129	80+	4000	3,1

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	REFLECTOR AND OPTICS	CONTROL GEAR	EMERGENCY	CONNECTION	OTHER	COLOUR
T830	DPRZ LT80	DALI	EM3	WIE3-0.5m	W625	RAL
T840	OP LT80	EAIRB-M ^{1 2 3}	EM3A	WIE5D-0.5m		
	OP TP(a)	EAIRB-S ^{2 3}	EM3D	Schuko-1.5m		
		BLT		Schuko-3.0m		
		COR				
		COR1min				
		COR30min				

1 Ingress protection IP20

2 Max system size 1x EAIRB-M + 3x EAIRB-S


3 Max wire length from EAIRB-M to last EAIRB-S - 11 m

AVAILABLE ACCESSORIES:



Product: Recessed MTG FRAME
S626x626 RAL9003S
Description: Frame for LED luminaire
595x595mm installation into
plasterboard ceiling (1pcs), white steel

OP LT80



DPRZ LT80

