

RK-EU-PA07

Recessed Panels




DESCRIPTION: Recessed mounted LED luminaire
Light distribution type: indirect
Optical system: white perforated steel louver with soft light distribution, opal polycarbonate film
Housing: steel
Colour: white, RAL9003

GENERAL DATA: Mains voltage: 220-240V, 0/50-60Hz
LED lifetime, h: 100000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP20
Mechanical impact resistance: IK02
Operating temperature range, °C: ta 0...+35

INSTALLATION: In modular suspended ceilings (600), in ceilings with cut-out openings (mounting frame to be ordered separately). Push-in terminal, 3x2x2.5mm²

ENVIRONMENT: Indoor

APPLICATION: Office, education, corridor, retail, public place

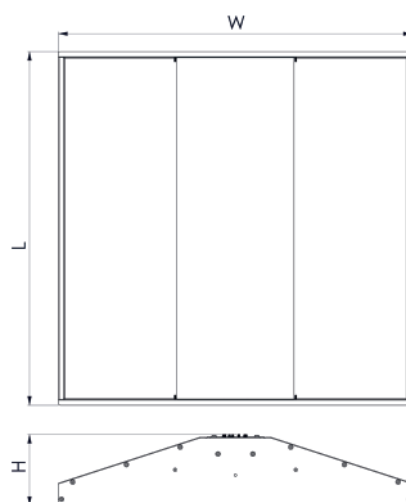

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PA07 1x2900 G359 T840	595	595	125	2895	26,5	109	80+	4000	3,8
RK-EU-PA07 1x3700 G360 T840	595	595	125	3658	34,5	106	80+	4000	3,8
RK-EU-PA07 1x4200 G361 T840	595	595	125	4194	41,0	102	80+	4000	3,8

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	EMERGENCY	CONNECTION
T830	DALI	EM3	WIE3
T840	BLT	EM3A	WIE5
	KRBLT	EM3D	WIE5D
	KRBLT DALI		Schuko-1.5m
	COR		Schuko-3.0m
	COR1min		
	COR30min		

AVAILABLE ACCESSORIES:



Product: Recessed MTG FRAME S626x626 RAL9003S
Description: Frame for LED luminaire 595x595mm installation into plasterboard ceiling (1pcs), white steel

STANDARD

