


RK-EU-DS06

Diffused Surface Lights



DESCRIPTION:	Surface mounted plastic LED luminaire with adjustable output Light distribution type: direct Optical system: opal polycarbonate diffuser, UV stable, impact resistant Housing: polycarbonate Colour: white; black
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 50000/L70B50 SDCM: 5 Protection class IEC: II Ingress protection code: IP65 Mechanical impact resistance: IK10 Operating temperature range, °C: ta -20...+40
INSTALLATION:	On the ceiling or wall. Push-in terminal, 2x2x2.5mm ²
ENVIRONMENT:	Indoor/Outdoor with roof
APPLICATION:	Office, education, corridor, staircase, public place

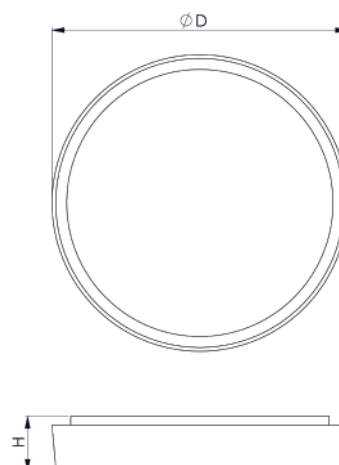

PRODUCT	DIAMETER, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-DS06 1x1000/1500/2000/2550 J584 T830/40	352	68	1000/1500/2000/2550	10/14/18/22	95/100/100/102	80+	3000/4000	1,4
RK-EU-DS06 1x1000/1500/2000/2550 J584 T830/40 BLACK	352	68	1000/1500/2000/2550	10/14/18/22	95/100/100/102	80+	3000/4000	1,4

*Tolerance range for optical and electrical data : -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	SENSORS	EMERGENCY
T830	DALI ¹	MW	EM3 ²
T840	BLT	MWRFM+	EM3A ²
	KRBLT	MW DALI2	EM3D ²
	KRBLT DALI	MW KRBLT	EM3Atmin-25
	COR ¹	MW KRBLT DALI	

¹ For DALI, COR options, indicate what output is required

² Operating temperature range for Luminaires with EM option, C: ta 0... +35

STANDARD

