


RK-EU-WL10

Wall Lights



DESCRIPTION:	Surface mounted anti-vandal LED bulkhead Light distribution type: direct Optical system: opal polycarbonate diffuser, impact resistant Housing: aluminium Colour: dark grey, RAL7043
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz LED lifetime, h: 50000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP54 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -25...+40
INSTALLATION:	On the wall. Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Outdoor
APPLICATION:	Facade illumination, parking area, public space

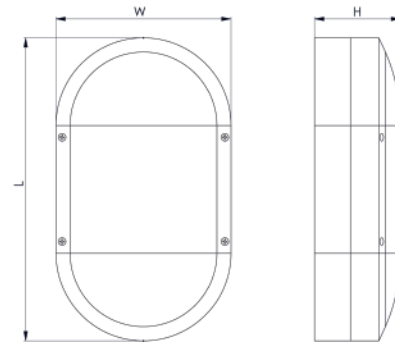


PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-WL10 B 1E27 Q83	280	185	95						
RK-EU-WL10 B 1x900 D055 T840	280	185	95	901	9,4	96	80+	4000	1,5
RK-EU-WL10 B 1E27 Q83 GRID	280	185	95						
RK-EU-WL10 B 1E27 Q83 LOUVER	280	185	95						
RK-EU-WL10 B 1x500 D056 T840 LOUVER	280	185	95	476	7,1	67	80+	4000	1,6

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:

LED	PROTECTION	COLOUR
T830	IP65	RAL
T840		

STANDARD



LOUVER

