



RK-EU-HB06

High-bays




DESCRIPTION: **Recessed mounted low-bay LED luminaire** **Light distribution type:** direct
Optical system: lenses, silicone rubber sealing, impact resistant
Housing: aluminium
Colour: white, RAL9003

GENERAL DATA: **Mains voltage:** 220-240V, 0/50-60Hz
LED lifetime, h: 100000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP65
Mechanical impact resistance: IK08
Operating temperature range, °C: ta -20...+40

INSTALLATION: In ceiling with cut-out opening. Cable 1.0m, 3x0.75mm²

ENVIRONMENT: Outdoor with roof

APPLICATION: Fuel station

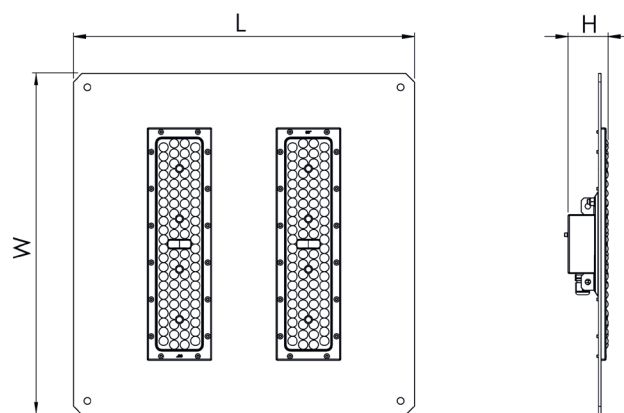

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	CUT-OUT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-HB06 1x9850 J679 T840 L75	370	370	55	340x270	9818	56,7	173	80+	4000	2,2
RK-EU-HB06 1x11650 J680 T840 L75	370	370	55	340x270	11617	68,1	171	80+	4000	2,2
RK-EU-HB06 1x13500 J681 T840 L75	370	370	55	340x270	13461	80,3	168	80+	4000	2,2

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Power supply connector - IP66/IP68, 3x1.5mm²
Description: Quick and easy to connect power supply and luminaire cables connector - IP66/IP68, 3x1.5mm², 450V/10A, 1pcs



Product: Power supply plug - IP66/IP68, 5x1.5mm²
Description: Quick and easy to connect power supply cable plug - IP66/IP68, 5x1.5mm², 400V/16A, 1pcs



Product: Power supply socket - IP66/IP68, 5x1.5mm²
Description: Quick and easy to connect power supply cable socket - IP66/IP68, 5x1.5mm², 400V/16A, 1pcs



Product: Surface MTG BOXRK-EU-HB06 white 375x375x70mm
Description: Surface mounting box for RK-EU-HB06, white steel, 375x375x70mm

OPTIONS AVAILABLE ON REQUEST:


LED	REFLECTOR AND OPTICS	CONTROL GEAR	SENSORS	PROTECTION
T830	L30x65	DALI	HBPIR-M ²	ta+55C ³
T840	L40	COR		
	L60	COR1min		
	L75	COR30min ¹		
	L120			

¹ COR options are not applicable for model: J681


² This model does not have daylight harvesting function

³ Please ask for special models with ta+55C


L30x65




L40



L60



L75



L120

