


RK-EU-WP02

Waterproof and Cleanroom Luminaires



DESCRIPTION:	Surface mounted or suspended waterproof LED luminaire Light distribution type: direct/indirect Optical system: opal polycarbonate diffuser, UV stable, impact resistant Housing: polycarbonate Colour: transparent
GENERAL DATA:	Mains voltage: 220-240V, 50-60Hz / 220-240V, 0/50-60Hz LED lifetime, h: 100000/L80B10 SDCM: 3 Protection class IEC: I Ingress protection code: IP66 Mechanical impact resistance: IK10 Operating temperature range, °C: ta -20...+35/+40
INSTALLATION:	On the ceiling or wall (mounting brackets included), or suspended (hooks included). Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Indoor/outdoor with roof
APPLICATION:	Industry, warehouse, hall, sports, public place, parking area, transport terminal, parking area

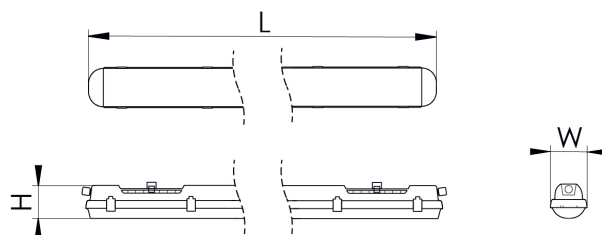

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-WP02 1x3000 J597 T840 PC/PC OP	1175	98	84	2992	18,0	166	80+	4000	1,7
RK-EU-WP02 1x4500 J598 T840 PC/PC OP	1175	98	84	4488	26,3	171	80+	4000	1,7
RK-EU-WP02 1x6000 J599 T840 PC/PC OP	1175	98	84	5984	33,6	178	80+	4000	1,7
RK-EU-WP02 1x6800 J600 T840 PC/PC OP	1175	98	84	6757	38,6	175	80+	4000	1,7
RK-EU-WP02 1x7500 J601 T840 PC/PC OP	1175	98	84	7480	41,5	180	80+	4000	1,7
RK-EU-WP02 1x6350 J602 T840 PC/PC OP	1455	98	84	6335	36,2	175	80+	4000	2,0
RK-EU-WP02 1x7500 J603 T840 PC/PC OP	1455	98	84	7480	41,5	180	80+	4000	2,0
RK-EU-WP02 1x8450 J604 T840 PC/PC OP	1455	98	84	8447	47,2	179	80+	4000	2,0
RK-EU-WP02 1x9350 J605 T840 PC/PC OP	1455	98	84	9350	51,3	182	80+	4000	2,0

*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

AVAILABLE ACCESSORIES:



Product: Suspension MTG KIT - RK-EU-WP04/WP06/WP05/WP01/WP07 1.5m
Description: Suspension kit for RK-EU-WP04/WP06/WP05/WP01/WP07 luminaires, 1.5 meter, 2pcs

Product: Suspension MTG KIT - RK-EU-WP04/WP06/WP05/WP01/WP07 3.0m
Description: Suspension kit for RK-EU-WP04/WP06/WP05/WP01/WP07 luminaires, 3.0 meter, 2pcs



Product: Remote Control HRC-11
Description: The functionality of the sensors is controlled by a number of parameters which can be changed or programmed remote with an infrared handset
 *note - remote control for HBPIR-M; HBPIR DALI-M

OPTIONS AVAILABLE ON REQUEST:

LED	CONTROL GEAR	SENSORS	EMERGENCY	CONNECTION	OTHER	PROTECTION
T830	DALI ¹	MW	EM3 ⁴	5TB	IC	II
T840	BLT	HBPIR-M ²	EM3A ⁴	1LIN		
	KRBLT	HBPIR DALI-M ²	EM3Atmin-25	2LIN		
	KRBLT DALI	HBPIR KRBLT ²	EM3D ⁴	3LIN		
	COR	HBPIR KBRT DALI ²		1LIN2.5		
	COR1min			2LIN2.5		
	COR30min			3LIN2.5		
	eCOR MW			C3		

1 For DALI LIN option wires are 2x0.5mm²

2 Luminaire with integrated PIR sensor protection degree is IK05

3 Operating temperature range for Luminaires with EM option, °C: ta 0... +35

STANDARD

