


RK-EU-PL07

Park and Street Lights



DESCRIPTION:	Pole-mounted LED park luminaire Light distribution type: direct Optical system: lenses, tempered glass diffuser, impact resistant Housing: aluminium Colour: black grey, RAL7021
GENERAL DATA:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 100000/L90B10 SDCM: 3 Protection class IEC: I (II optional) Ingress protection code: IP66 Mechanical impact resistance: IK08 Operating temperature range, °C: ta -25...+40/ ta -40...+40
INSTALLATION:	With four screws on poles Ø60mm. Push-in terminal, 3x2x2.5mm ²
ENVIRONMENT:	Outdoor
APPLICATION:	Parking area, park, public space, street

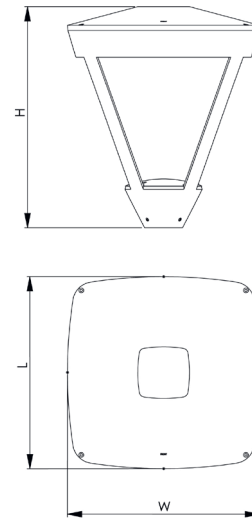

PRODUCT	LENGTH, mm	WIDTH, mm	HEIGHT, mm	LUMINAIRE OUTPUT*, lm	SYSTEM POWER*, W	SYSTEM EFFICACY*, lm/W	CRI	CCT*, K	WEIGHT, kg
RK-EU-PL07 1x5350 E946 T740 LS140	475	475	535	5468	43,3	126	70+	4000	12,0
RK-EU-PL07 1x6150 E947 T740 LS140	475	475	535	6321	51,0	124	70+	4000	12,0
RK-EU-PL07 1x8200 E948 T740 LS140 Tmin-40C	475	475	535	8427	68,7	123	70+	4000	12,0
RK-EU-PL07 1x10250 E949 T740 LS140 Tmin-40C	475	475	535	10521	87,7	120	70+	4000	12,0


*Tolerance range for optical and electrical data: -10%. Values apply to an ambient temperature of 25°C. RIKADA is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

OPTIONS AVAILABLE ON REQUEST:


LED	REFLECTOR AND OPTICS	CONTROL GEAR	SENSORS	PROTECTION	COLOUR
T730	LS140	DALI	PCA ¹	Tmin-40C	RAL
T740	LSM1	ADIM		II	
T750	LSS1				

¹ With PCA option luminaire operating temperature range starts from -25°C

LS140



LSM1



LSS1

